




MANUFACTURING? BEARING INDONESIA

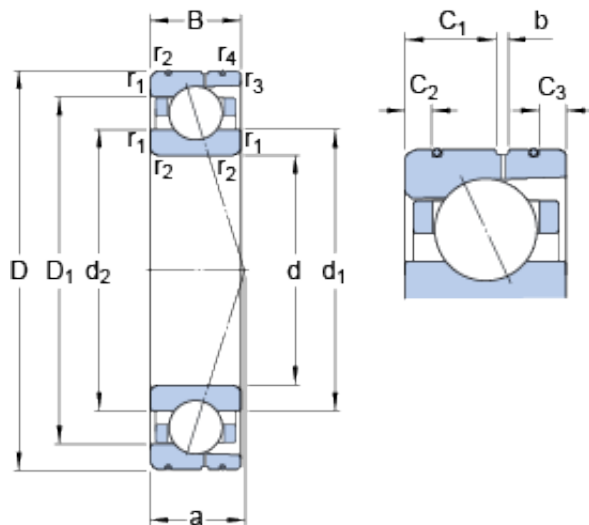

70 mm x 100 mm x 16 mm 70 mm x 100 mm x 16 mm SKF 71914 CD/P4AL angular contact ball bearings

Bearing No. 71914 CD/P4AL

71914 CD/P4AL Bearing 2D drawings and 3D CAD models

Size	100x70x16 mm
Bore Diameter	100 mm
Outer Diameter	70 mm
Width	16 mm
d	70 mm
D	100 mm
B	16 mm
d ₁	79.2 mm
d ₂	79.2 mm
D ₁	90.8 mm
b	2 mm
C ₁	8.6 mm
C ₂	3.5 mm
C ₃	2.8 mm
r _{1,2} - min.	1 mm
r _{3,4} - min.	0.3 mm
a	19.4 mm
d _a - min.	74.6 mm
d _b - min.	74.6 mm
D _a - max.	95.4 mm
D _b - max.	98 mm
r _a - max.	1 mm
r _b - max.	0.3 mm
d _n	81.7 mm



MANUFACTURING BEARING INDONESIA

Basic dynamic load rating - C	34.5 kN
Basic static load rating - C ₀	34 kN
Fatigue load limit - P _u	1.4 kN
Limiting speed for grease lubrication	13000 r/min
Limiting speed for oil lubrication	20000 mm/min
Ball - D _w	9.525 mm
Ball - z	24
G _{ref}	4.5 cm ³
Calculation factor - f ₀	16.2
Preload class A - G _A	130 N
Preload class B - G _B	260 N
Preload class C - G _C	520 N
Preload class D - G _D	1040 N
Calculation factor - f	1.19
Calculation factor - f	1
Calculation factor - f _{2A}	1
Calculation factor - f _{2B}	1.04
Calculation factor - f _{2C}	1.09
Calculation factor - f _{2D}	1.15
Calculation factor - f _{HC}	1
Preload class A	76 N/micron
Preload class B	104 N/micron
Preload class C	147 N/micron
Preload class D	215 N/micron
d ₁	79.2 mm
d ₂	79.2 mm
D ₁	90.8 mm
C ₁	8.6 mm



MANUFACTURING?BEARING INDONESIA

C_2	3.5 mm
C_3	2.8 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.3 mm
d_a min.	74.6 mm
d_b min.	74.6 mm
D_a max.	95.4 mm
D_b max.	98 mm
r_a max.	1 mm
r_b max.	0.3 mm
d_n	81.7 mm
Basic dynamic load rating C	34.5 kN
Basic static load rating C_0	34 kN
Fatigue load limit P_u	1.43 kN
Attainable speed for grease lubrication	13000 r/min
Attainable speed for oil-air lubrication	20000 r/min
Ball diameter D_w	9.525 mm
Number of balls z	24
Reference grease quantity G_{ref}	4.5 cm ³
Preload class A G_A	130 N
Static axial stiffness, preload class A	76 N/ μ m
Preload class B G_B	260 N
Static axial stiffness, preload class B	104 N/ μ m
Preload class C G_C	520 N
Static axial stiffness, preload class C	147 N/ μ m
Preload class D G_D	1040 N
Static axial stiffness, preload class D	215 N/ μ m



MANUFACTURING?BEARING INDONESIA

Calculation factor f	1.19
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.04
Calculation factor f_{2C}	1.09
Calculation factor f_{2D}	1.15
Calculation factor f_{HC}	1
Calculation factor f_0	16.2
Mass bearing	0.33 kg