




## MANUFACTURING? BEARING INDONESIA

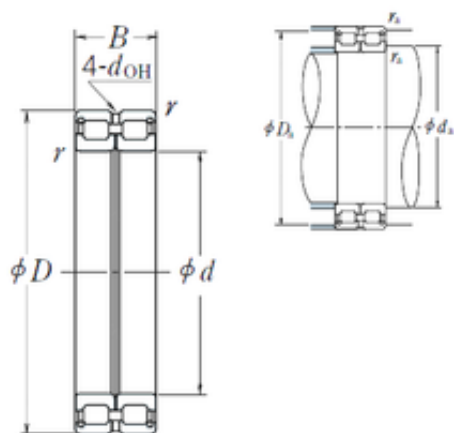

160 mm x 220 mm x 60 mm 160 mm x 220 mm  
x 60 mm NSK RS-4932E4 cylindrical roller  
bearings

Bearing No. RS-4932E4

RS-4932E4 Bearing 2D drawings and 3D CAD models

|                               |               |
|-------------------------------|---------------|
| Size                          | 160x220x60 mm |
| Bore Diameter                 | 160 mm        |
| Outer Diameter                | 220 mm        |
| Width                         | 60 mm         |
| d                             | 160 mm        |
| D                             | 220 mm        |
| B                             | 60 mm         |
| C                             | 60 mm         |
| r min.                        | 2 mm          |
| da min.                       | 169 mm        |
| Da max.                       | 211 mm        |
| ra max.                       | 2 mm          |
| Weight                        | 7 Kg          |
| Basic dynamic load rating (C) | 410 kN        |
| Basic static load rating (C0) | 930 kN        |
| (Grease) Lubrication Speed    | 600 r/min     |
| hidYobi                       | RS-4932E4     |
| LangID                        | 1             |
| D_                            | 220           |
| B_                            | 60            |
| hidTable                      | ecat_NSCLDRS  |
| Oil rpm                       | 600           |
| mass                          | 7             |
| GRS rpm                       | 1200          |



## MANUFACTURING?BEARING INDONESIA

|            |                 |
|------------|-----------------|
| ra         | 2               |
| da_min     | 169             |
| C0         | 930             |
| DE_        | 204.1           |
| Prod_Type3 | CRB_FRFS_OT_FIX |
| DA_        | 13              |
| Z_         | 46              |
| yobi       | RS-4932E4       |
| da_max     | 211             |
| SDM_       | 191.1           |
| r          | 2               |
| KBRG       | 4220            |
| DI_        | 178.1           |
| doh        | 5               |